


Mounting Dimension



THR24B1

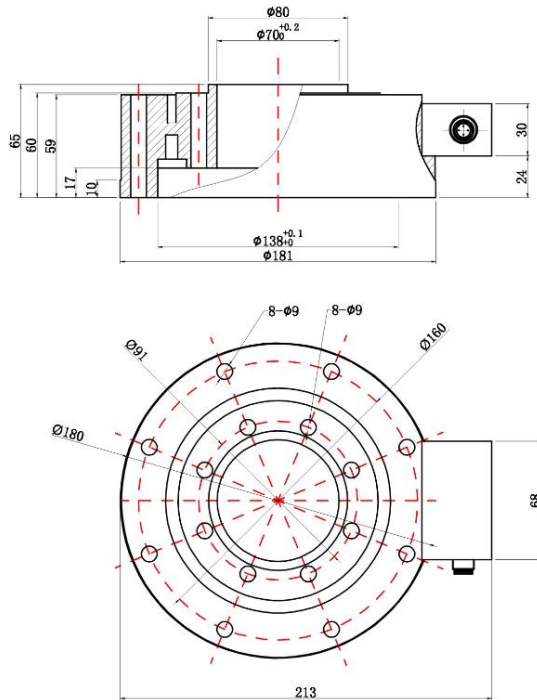


Features & Applications

- Suitable for injection molding machine and other industrial testing and control system .
- Durability: 10^6 times with rated capacity.

Specifications	Technique
Capacity	15T
Rated output	4-20mA
Non-linearity	0.6%F.S.
Hysteresis	0.6%F.S.
Repeatability	0.2%F.S.
Temp.effect on output	0.15%F.S./10°C
Temp.effect on zero	0.15%F.S./10°C
Power supply voltage	24DC
Compensated temp range	-10~40°C
Operation temp range	-10~70°C
Safe overload	150%F.S.
Ultimate overload	200%F.S.
Cable size	$\phi 6.5 \times 3m$
Material	Alloy Steel
IP Class	IP65

Load Direction



Wiring Code

