



THR908

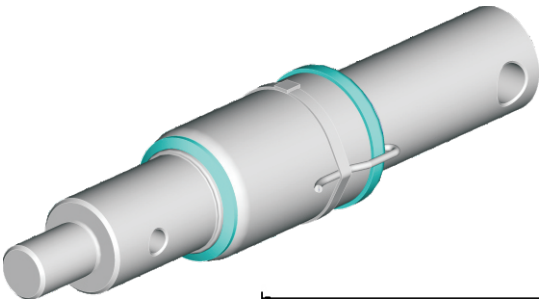


安装尺寸 Mounting Dimension

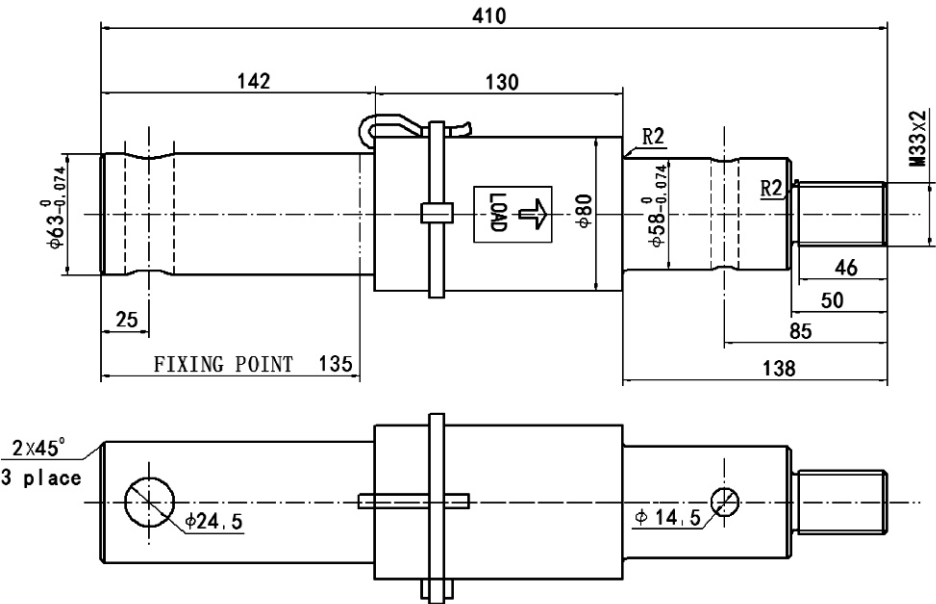

特点与用途 Features & Applications

- 合金钢传感器
- 安全可靠
- 饲料车用传感器
- Alloy steel load cell
- Safety and reliability
- Used for Feed truck

配线图 Wiring Code

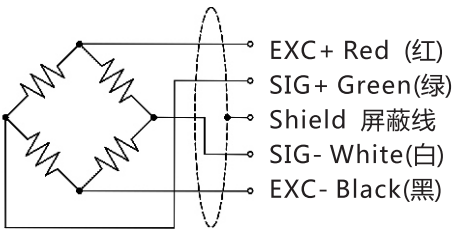

参数	Specifications	技术指标/Technique
额定容量	Capacity	5T
输出灵敏度	Rated output	0.77±0.005mV/V
零点输出	Zero balance	±1%F.S.
非线性	Non-linearity	0.5%F.S.
重复性	Repeatability	0.1%F.S.
蠕变 (30min)	Creep(30min)	0.05%F.S.
温度灵敏度漂移	Temp.effect on output	0.05%F.S./10°C
零点温度漂移	Temp.effect on zero	0.07%F.S./10°C
输入电阻	Input impedance	380±30Ω
输出电阻	Output impedance	350±3Ω
绝缘电阻	Insulation	≥5000MΩ/ 50VDC
激励电压	Recommended excitation	5-12V
最大激励电压	Maximum excitation	18V
温度补偿范围	Compensated temp range	-10~40°C
工作温度范围	Operation temp range	-35~70°C
安全超载	Safe overload	120%F.S.
极限超载	Ultimate overload	150%F.S.
电缆线尺寸	Cable size	Φ5.0 x 5m
材料	Material	Alloy steel