



TS912

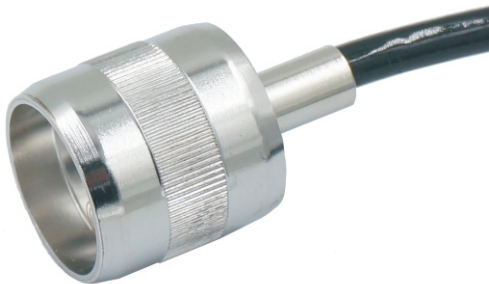


特点与用途 Features & Applications

- 安装方便，只需用螺栓固定
- 防护等级：IP68
- 用于被测物的动、静载实时应变监控，如起重机，压力机和辊轧机
- simply bolted into place
- IP65 protection
- For the measured objects of static and dynamic load monitoring. Such as cranes, presses and roll stand


测量方式 measurement

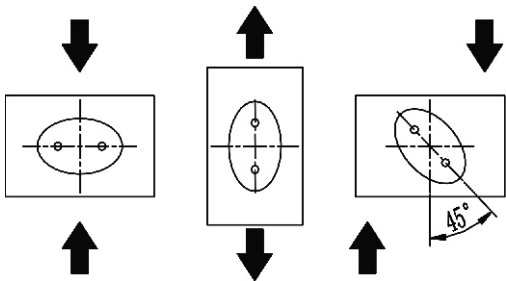


配线图 Wiring Code

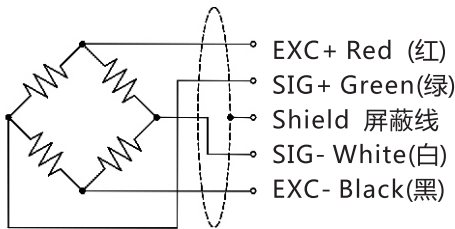

安装尺寸 Mounting Dimension

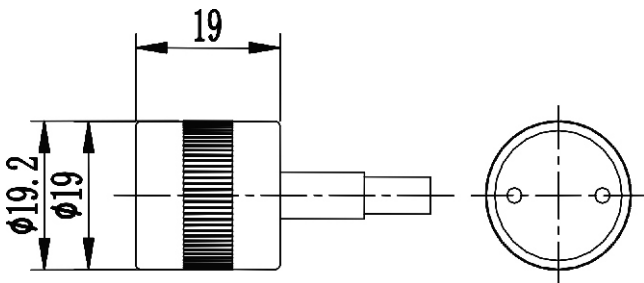

安装方式 Installation

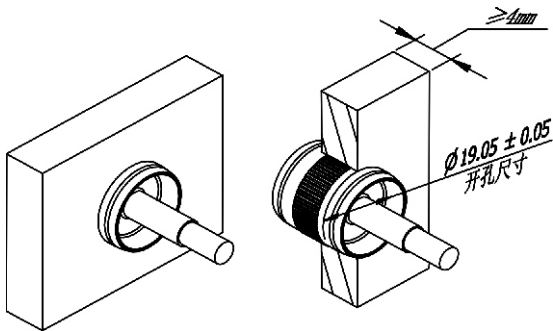

测量方式/参数	Specifications	技术指标/technique
额定容量	Capacity	20N/mm ²
零点输出	Zero balance	±0.25 F.S.
非线性	Non-linearity	0.1%F.S.
温度灵敏度漂移	Temp.effect on output	0.03%F.S./10°C
零点温度漂移	Temp.effect on zero	0.03%F.S./10°C
输入电阻	Input impedance	700±10Ω
输出电阻	Output impedance	700±10Ω
绝缘电阻	Insulation	≥5000mΩ/100vdc
激励电压	Recommended excitation	5~15v
最大激励电压	Maximum excitation	20v
温度补偿范围	Compensated temp range	-10~40°C
工作温度范围	Operation temp range	-20~60°C
安全超载	Safe overload	150%F.S.
极限超载	Ultimate overload	200%F.S.
电缆线尺寸	Cable size	Φ4×2000mm
材料	Material	Stainless steel
单件重量	Weight approx.	0.1kg
防护等级	IP Class	IP68