


TS117




特点与用途 Features & Applications

- 超薄设计, 变形量小, 外形尺寸小、量程大
- 不锈钢材料, 高温可定制
- 防护等级: IP65, 可定制
- 汽车压装、自动化组装、3C产品测试、新能源产品组装、医疗检测、机器人领域, 模具组装及其他工业测试、测量及控制系统
- 动态响应频率高
- Ultra-thin construction with small deflection and mini dimension and big capacity
- Made of stainless steel, High temperature could be customized
- ,IP65 protection, customizable
- Suitable for Automotive press fit, automated assembly, 3C products testing, new energy product assembly, medical testing, robotics, mold assembly and other industrial testing and control system
- High dynamic response frequency


受力方式 Load Direction

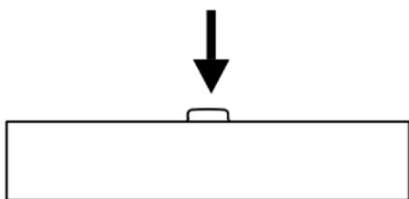

配线图 Wiring Code

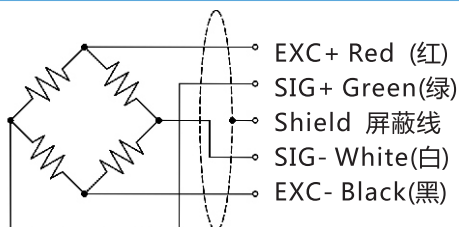

安装尺寸 Mounting Dimension

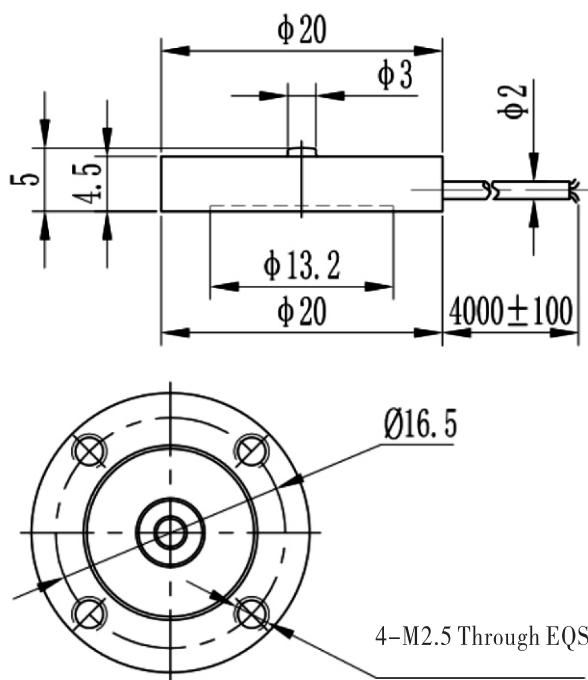

参数	Specifications	技术指标/Technique
额定容量	Capacity	50,100,200,500,1000N
输出灵敏度	Rated output	1.5±20% mV/V
零点输出	Zero balance	±0.05 mV/V
非线性	Non-linearity	0.50% F.S.
滞后	Hysteresis	0.50% F.S.
重复性	Repeatability	0.20% F.S.
蠕变 (30min)	Creep(30min)	0.20% F.S.
温度灵敏度漂移	Temp.effect on output	0.05% F.S./10°C
零点温度漂移	Temp.effect on zero	0.05% F.S./10°C
输入电阻	Input impedance	800~1100Ω
输出电阻	Output impedance	800~1100Ω
绝缘电阻	Insulation	≥5000MΩ/100VDC
激励电压	Recommended excitation	5~12V
最大激励电压	Maximum excitation	15V
温度补偿范围	Compensated temp range	-10~60°C
工作温度范围	Operation temp range	-20~80°C
安全超载	Safe overload	150% F.S.
极限超载	Ultimate overload	200% F.S.
电缆线尺寸	Cable size	Φ2×4000mm
单件重量	Weight approx.	0.1kg
材料	Material	Stainless Steel
防护等级	IP Class	IP65